
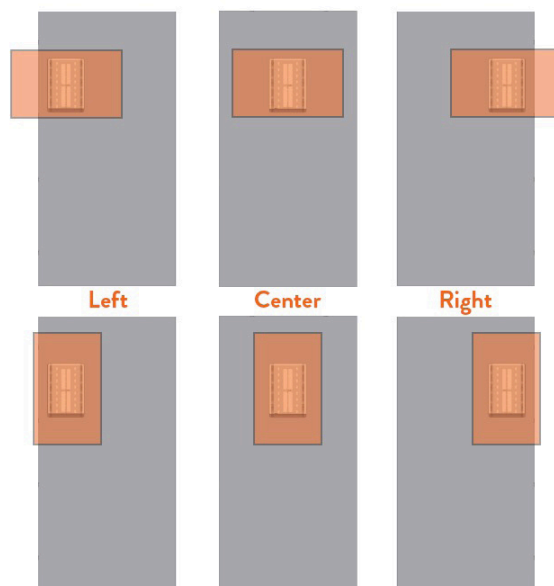
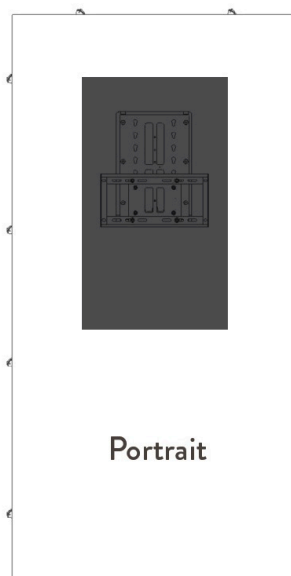
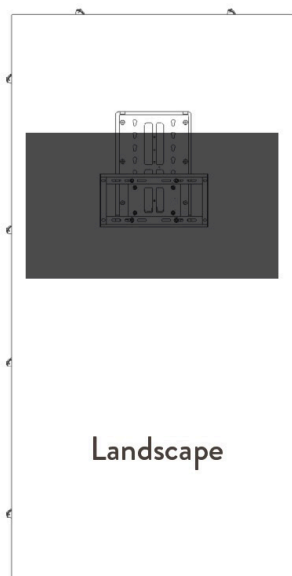


NOTE:

- The TV mounts are not attached to the Superflat for shipping.
- The TV bracket is to be mounted on site to the top two horizontal supports on the Superflat.
- TV must weigh less than 100 lbs
- TV mount fits most 26"-55" TVs with the following VESA patterns:
 - 75X75mm (3"x3")
 - 100X100mm (4"x4")
 - 200X100mm (8"x4")
 - 200X200mm (8"x8")
 - 300X200mm (12"x8")
 - 300X300mm (12"x12")
 - 400X300mm (16"x12")
 - 400X300mm (16"x12")
- TV mount can be positioned in three locations and the panel will be cut accordingly. (See below)
- TV can be mounted vertically or horizontally (See below)

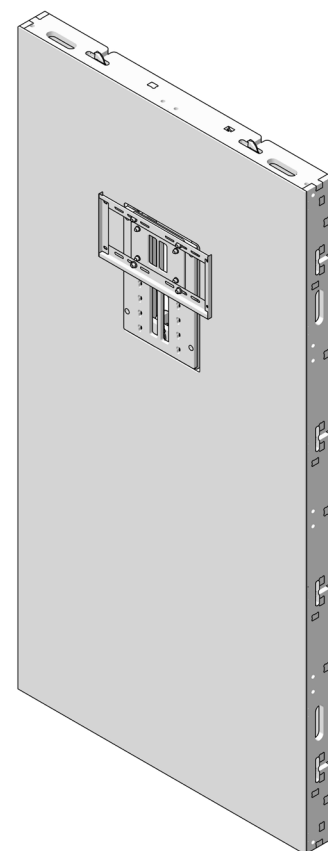


NOTE:

TV Orientations (Shown with 40" TV - For illustration purposes only)


STEP ONE

Hook TV mount unit onto top rail of superflat so that the mount is centered in the panel opening.

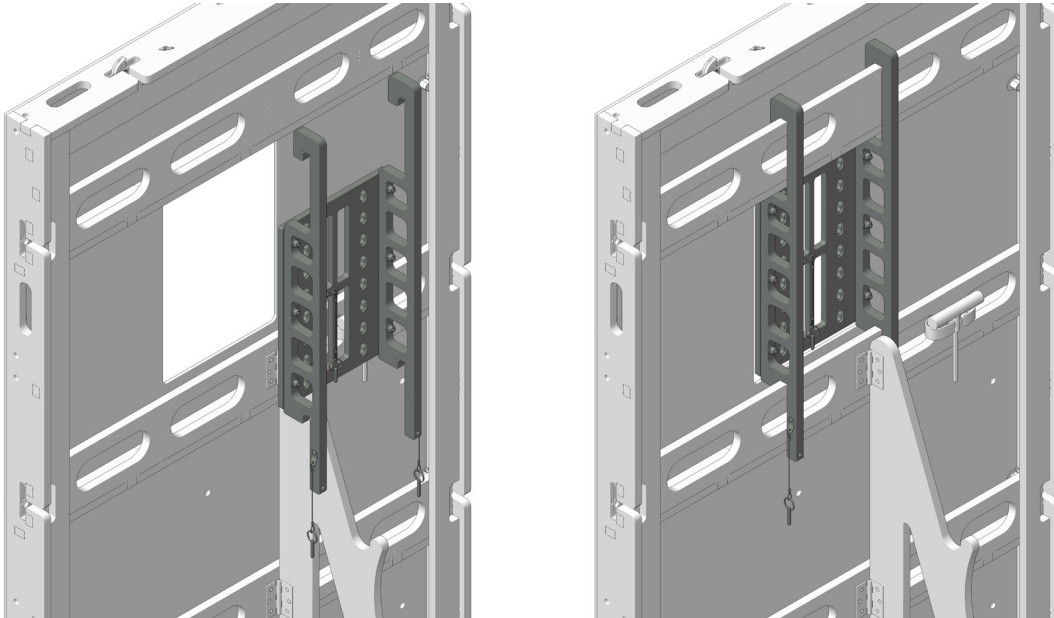



STEP TWO

Use the (2) pins to lock the TV Mount onto the Superflat. Place pins through the hole on the mount and under the rail of the Superflat.

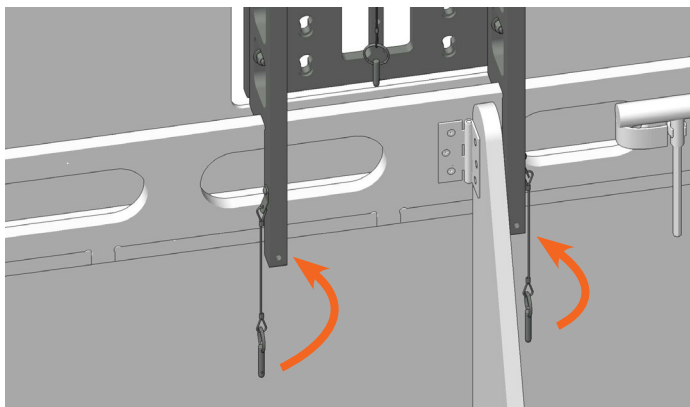


STEP THREE

Attach mounting plate to the front side of the bracket using the four locating bolts. Hook the bolts in and slide the plate down to lock in place.

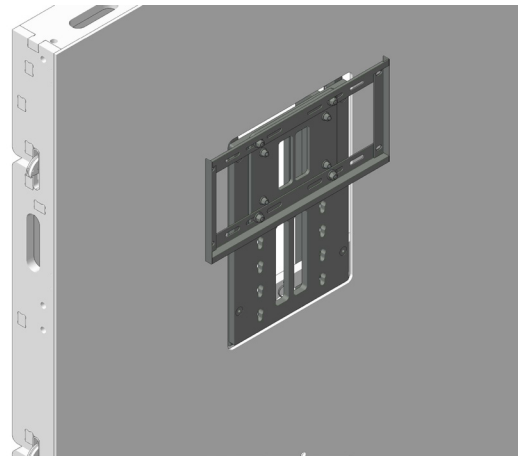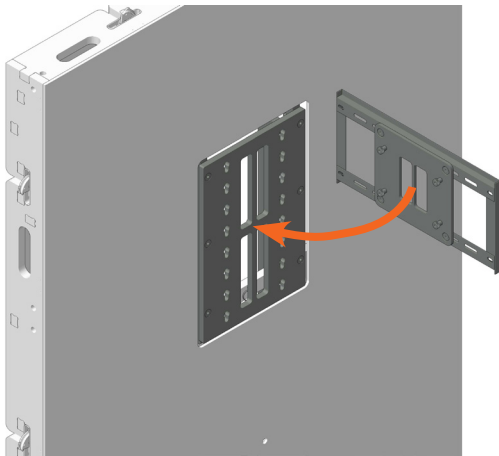

NOTE:

- Mounting plate can be adjusted vertically a total of 10" in six increments of 2"
- Mounting plate height ranges from 60.5" - 70.5" from the floor (on center)
- Additional height flexibility is possible depending on how brackets are installed on to the TV

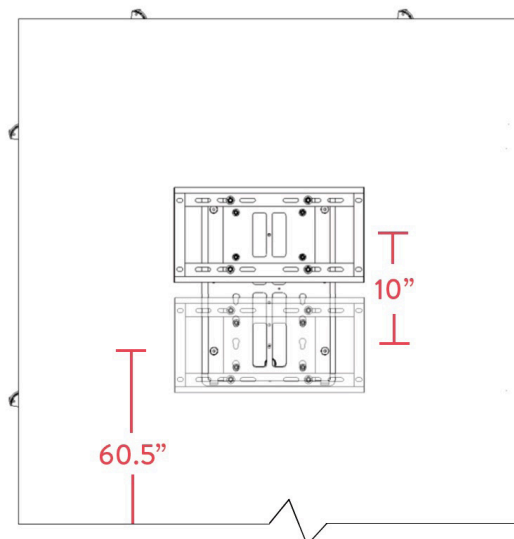

STEP FOUR

Use pin to lock the TV Mounting Plate in place when desired height is achieved

